


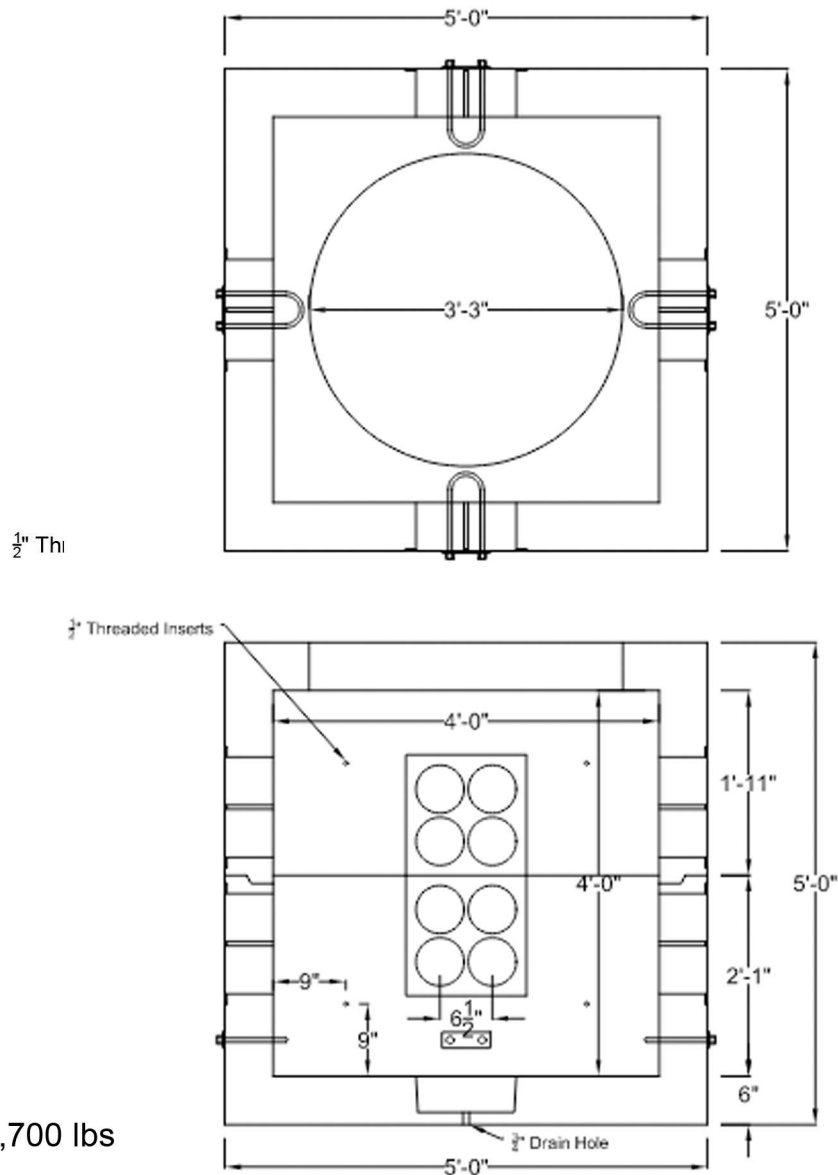

Standard Features

- MDOT S2 5000 PSI Concrete @ 28 Days
- Design for HS-25 Traffic Loading
- 1" Dia. Galvanized Pulling Irons
- 1/2" Dia. Threading Inserts - 6 Per Side
- ASTM A615 Grade 60 Rebar
- ASTM A185 Welded Wire
- Reinforcement bent to ACI 318 spec.

Standard Options

- Cast Iron Frame and Cover
- Cover Lettering Options Available
- 6" and 12" Precast Adjustment Rings
- 1" Butyl Mastic